

FILTER OVERVIEW WITH SERVICE INTERVALS AND CAPACITIES

4000 Series Compact Utility Tractor - 4010, 4110, 4115

FILTER KIT


(4010) – [LVA21192](#)
M806418, CH15553, LVA802833, M809050, M113621
(4110) – [LVA21197](#)
M806418, CH15553, LVU800097, M113621
(4115) – [LVA21193](#)
M806419, CH15553, LVU800097, M113621

Each kit contains above filter, offering a complete solution for your maintenance needs to keep your tractor running at peak performance.

ENGINE FUEL FILTER

[CH15553](#)

Replace after every 500 hours.

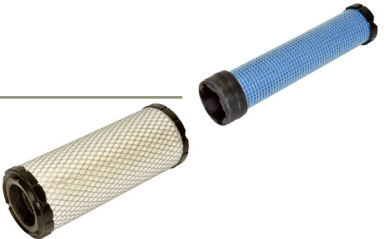

ENGINE PRIMARY AIR FILTER SECONDARY AIR FILTER

[M113621](#)

[M123378](#)

Check after every 500 hours and replace as needed.

TRANSMISSION

OIL FILTER

(4010) – [LVA802833](#)

(4110, 4115) – [LVU800097](#)

Replace initially after 50 hours and after every 400 hours.

(Click here for [capacity](#))



ENGINE

OIL FILTER

(4010, 4110) - [M806418](#)

(4115) - [M806419](#)

Replace initially after 50 hours and after every 200 hours.

(Click here for [capacity](#))



JOHN DEERE

Genuine Parts and Service

https://www.deere.com/en_US/parts/parts_by_industry/ag/fmi/filter_maintenance_information.page

CAPACITIES

4000 Series Compact Utility Tractor - 4010, 4110, 4115

CAPACITIES (Approximate):

Fuel Tank:

4010.....	13 L (3.4 gal)
4110.....	22 L (5.8 gal)
4115.....	27 L (7.1 gal)

Cooling System:

Cool-Gard™ II

.....	2.4 L (0.63 gal)
-------	------------------

Engine Crankcase W/ Filter:

Plus-50™ II

4010, 4115.....	2 L (0.53 gal)
4110.....	2.2 L (0.58 gal)

Transmission and Hydraulic System:

Low Viscosity Hy-Gard™

4010.....	10 L (2.6 gal)
4115.....	14.6 L (3.8 gal)

4110

CST.....	13.5 L (3.6 gal)
HST.....	13.3 L (3.5 gal)

FRONT AXLE:

GL-5 Lubricant 80W-90

.....	3.4 L (0.9 gal)
-------	-----------------

[Return to Filter Overview](#)

