

# REPLACEMENT PARTS GUIDE

## Z925M EFI ZTrak™ M Series Mower

### ENGINE



#### OIL FILTER

[AM125424](#)

Change every 100 Hrs.



#### ENGINE OIL

[TY22029](#) (Turf-Gard™ - 10W-30) (With Filter)  
(1.9 L (2.0 qt))

Change every 100 Hrs.



#### AIR FILTER

[M131802](#) (PRIMARY)

Change every 300 Hrs.

[M131803](#) (SECONDARY)

Change every 500 Hrs.



Multi-Purpose SD Polyurea Grease  
[TY6341](#)

#### GREASE GUN

[TY26518](#)

Change As Required.



#### FUEL FILTER

[MIU13224](#) (USE WITH [MIA12253](#))

[UC16183](#) (USE WITH [MIA13021](#) OR  
[MIA12650](#) OR [AUC14248](#))

Change every 300 Hrs.



#### SPARK PLUG

[MIU11020](#)

Change every 1000 Hrs.



### ELECTRICAL



#### IGNITION SWITCH

[TCA22740](#) (S/N (- 070000))

[AUC18708](#) (S/N ( 070001-))



#### HEADLIGHT BULB

[AM118013](#) (37.5 W)



#### IGNITION KEY

[AUC12681](#)



#### BATTERY

[TY25221B](#) (12 V) (FOR CANADA AND USA)

[MCYP340PF](#) (12 V) (NOT FOR CANADA  
AND USA)

### FUEL & AIR



#### FILLER CAP

[TCA23672](#) (S/N (- 060000))

[AUC11638](#) (S/N ( 060001-))



#### MUFFLER

[TCA21571](#)

### TRANSMISSION/ HYDRAULIC



#### HYDRAULIC OIL FILTER

[MIA881446](#)

Change every 500 Hrs After 300 hour Initial  
Break In






#### TRACTION DRIVE BELT


[TCU34299](#) (LGTH = 1803.9 mm,  
WIDTH = 16 mm)





# REPLACEMENT PARTS GUIDE

## Z925M EFI with 54 inch Deck

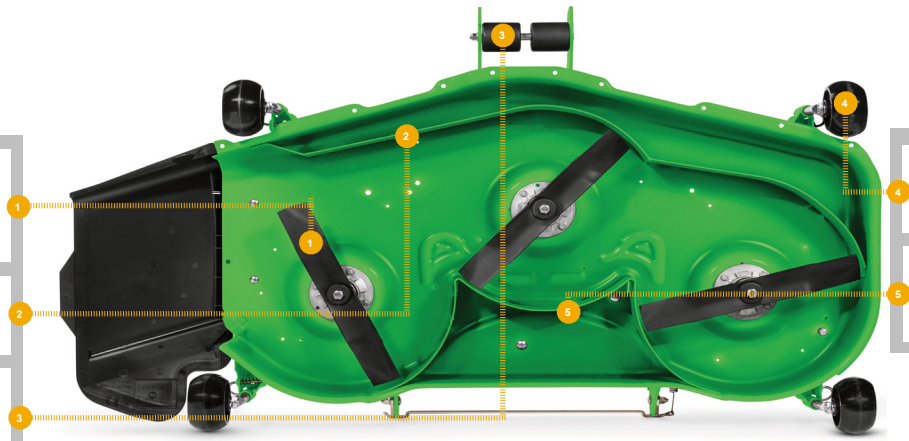






	<b>MOWER BLADE</b> <a href="#">TCU30317</a> (HIGH LIFT) <a href="#">TCU30316</a> (STANDARD LIFT)
	<b>MULCH BLADE</b> <a href="#">M135334</a>
	<b>ROLLER</b> <a href="#">TCU34060</a>






	<b>GAGE WHEELS</b> <a href="#">UC28193</a>
	<b>V BELT</b> <a href="#">TCU31132</a> (LGTH = 4635 mm, TK = 18 mm, WIDTH = 14 mm)

# REPLACEMENT PARTS GUIDE

## Z925M EFI with 60 inch Deck

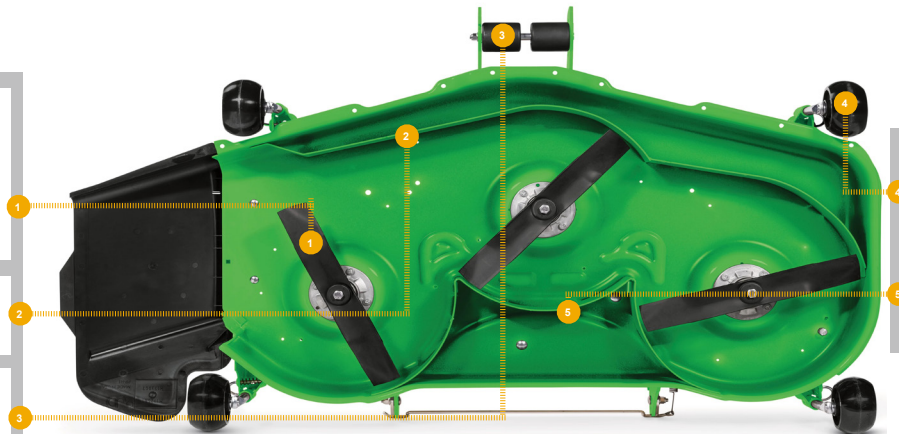	<b>MOWER BLADE</b>
	<a href="#">TCU15881</a> (HIGH LIFT)
	<a href="#">UC15158</a> (HIGH LIFT SELF SHARPENING)
	<a href="#">M128485</a> (STANDARD LIFT)
	<a href="#">M133381</a> (LOW LIFT)
	<b>MULCH BLADE</b>
	<a href="#">M168223</a>
	<b>ROLLER</b>
	<a href="#">TCU34060</a>



	<b>GAGE WHEELS</b>
	<a href="#">UC28193</a>
	<b>V BELT</b>
	<a href="#">TCU35604</a> (LGTH = 4635 mm, TK = 18 mm, WIDTH = 14 mm)