

FILTER OVERVIEW WITH SERVICE INTERVALS AND CAPACITIES

5000 Series - 5200, 5300, 5400 and 5500 Tractors

CAB

FRESH AIR FILTER
[R129370](#) (ALL)

Service after every 250 hours. Replace annually once. Service as required.



CAB

RECIRCULATION AIR FILTER
[RE195491](#)

Service after every 250 hours. Replace annually once. Service as required.




ENGINE

PRIMARY AIR FILTER
[RE68048](#), [RE45825](#) (5200, 5300)
[RE45827](#) (5400, 5500)

SECONDARY AIR FILTER
[RE68049](#), [RE45826](#) (5200, 5300)
[RE45828](#) (5400, 5500)

Service after every 250 hours. Replace annually once. Service as required.

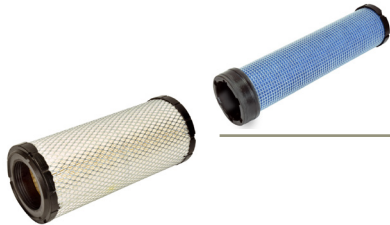

HYDRAULIC OIL FILTER
[RE45864](#) (ALL)

Replace after first 100 hours, then after 250 hours.

(Click here for [capacity](#))



ENGINE

FUEL FILTER
[RE62418](#) (ALL)

Replace after every 500 hours. Replace as required.



ENGINE OIL FILTER
[T19044](#) (ALL)

Replace after first 100 hours, then after 250 hours.

(Click here for [capacity](#))



JOHN DEERE

Genuine Parts and Service

CAPACITIES

5000 Series - 5200, 5300, 5400 and 5500 Tractors

CAPACITIES (Approximate):

Fuel Tank:

Open Station	
5200, 5300, 5400.....	68 L (18 gal)
5510.....	87 L (23 gal)
Cab	
.....	87 L (23 gal)

Cooling System:

Cool-Gard™ II

5200, 5300, 5400.....	9.5 L (2.08 gal)
5510.....	10.8 L (2.37 gal)

Crankcase w/ Filter:

.....	8.5 L (1.86 gal)
-------	------------------

Transmission and Hydraulic System:

Hy-Gard™

Dry Clutch.....	38 L (10 gal)
Wet Clutch.....	42.5 L (11 gal)

Mechanical Front Wheel Drive (MFWD) Axle:

Hy-Gard™

Axle Housing.....	5 L (1.09 gal)
Wheels Hub.....	0.6 L (0.13 gal)

[Return to Filter Overview](#)