

# FILTER OVERVIEW WITH SERVICE INTERVALS AND CAPACITIES


## 2000 Series Compact Utility Tractor - 2320

### FILTER KIT

[LVA21204](#)

M806418, MIU804763, M131802, LVA802810, AL221066

Each kit contains above filter, offering a complete solution for your maintenance needs to keep your tractor running at peak performance.

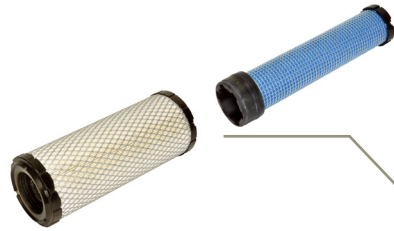

**ENGINE**  
**PRIMARY AIR FILTER**  
[M131802](#)  
**SECONDARY AIR FILTER**  
[M131803](#)

Check after every 600 hours and replace as needed.



**ENGINE**  
**FUEL FILTER**  
[MIU804763](#)

Replace after every 400 hours.



**ENGINE**  
**OIL FILTER**  
[M806418](#)

Replace initially after 50 hours and after every 200 hours.

(Click here for [capacity](#))



**TRANSMISSION**  
**OIL FILTER –** [AL221066](#)  
**HYDRAULIC**  
**OIL FILTER –** [LVA802810](#)

Replace initially after 50 hours and after every 200 hours.

(Click here for [capacity](#))



**JOHN DEERE**  
Genuine Parts and Service

[https://www.deere.com/en\\_US/parts/parts\\_by\\_industry/ag/fmi/filter\\_maintenance\\_information.page](https://www.deere.com/en_US/parts/parts_by_industry/ag/fmi/filter_maintenance_information.page)

# CAPACITIES

## 2000 Series Compact Utility Tractor - 2320

### CAPACITIES (Approximate):

#### Fuel Tank:

..... 23 L (6.1 gal)

#### Cooling System:

##### Cool-Gard™ II

..... 3.2 L (0.84 gal)

#### Engine Crankcase W/ Filter:

..... 3.2 L (0.84 gal)

#### Transmission and Hydraulic System:

##### Hy-Gard™

..... 13.1 L (3.5 gal)

#### FRONT AXLE:

##### Hy-Gard™

..... 3.4 L (0.89 gal)

[Return to Filter Overview](#)

